


JZ、JZS-涨铆圆螺母

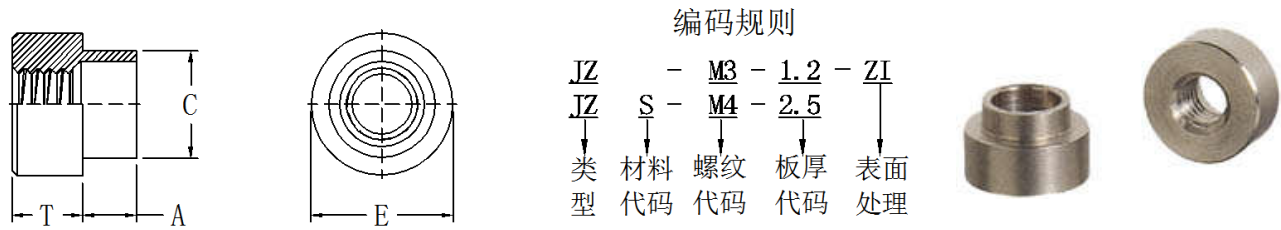

尺寸（单位：毫米 mm）

螺纹规格	螺母类型		螺纹代码	长度代码	A -0.05 -0.15	最小板厚	安装孔直径 +0.08	C 最大	E ±0.25	T ±0.25	最小孔边距
	碳钢	不锈钢									
M3 x 0.5	JZ	JZS	M3	1.2	1.18	1.2	5.00	4.98	7.00	3.00	5.9
				1.5	1.48	1.5					
				2.0	1.98	2.0					
				2.5	2.48	2.5					
				3.0	2.98	3.0					
M4 x 0.7	JZ	JZS	M4	1.5	1.48	1.5	6.00	5.98	8.00	4.00	6.9
				2.0	1.98	2.0					
				2.5	2.48	2.5					
				3.0	2.98	3.0					
				4.0	3.98	4.0					
M5 x 0.8	JZ	JZS	M5	2.0	1.98	2.0	8.00	7.98	10.00	5.00	7.1
				3.0	2.98	3.0					
				4.0	3.98	4.0					
				5.0	4.98	5.0					
				6.0	5.98	6.0					
M6 x 1	JZ	JZS	M6	4.0	3.98	4.0	9.00	8.98	11.00	6.00	8.6
				5.0	4.98	5.0					
				6.0	5.98	6.0					
				8.0	7.98	8.0					
M8 x 1.25	JZ	JZS	M8	5.0	4.98	5.0	11.00	10.95	13.00	6.00	9.7
				6.0	5.98	6.0					
				8.0	7.98	8.0					
				10.0	9.98	10.0					
M10 x 1.5	JZ	JZS	M10	5.0	4.98	5.0	14.00	13.95	16.00	7.00	13.6
				6.0	5.98	6.0					
				8.0	7.98	8.0					
				10.0	9.98	10.0					
M12 x 1.75	JZ	JZS	M12	5.0	4.98	5.0	16.00	15.95	18.00	8.50	16.5
				6.0	5.98	6.0					
				8.0	7.98	8.0					
				10.0	9.98	10.0					